

Quick Start - jQuery

Table of Contents

Chapter 7	7-1
Quick Start - jQuery	7-1
Using Haystack Generated Code for jQuery	7-2
Quick Start for jQuery Generation	7-2
Add New Haystack Project for jQuery	7-3
Generate CRUD Classes for Tables - jQuery	7-5
Table Information Screen for jQuery	7-6
Generate Table Data Classes for jQuery	7-7
Create New Web API Project	7-9
Copy Generated Files for jQuery	7-10
Include jQuery Files in Project (VS Bug)	7-13
Add DLLs for jQuery	7-14
Fix up the Web.Config File for jQuery	7-15
Modify the Global.asax for jQuery	7-15
Prepare to Run the HTML Page with jQuery	7-16
Modify [ClassName].html File	7-17
Chapter Index	7-21

Using Haystack Generated Code for jQuery

Haystack generates generic .NET code that can be used in any version of .NET from 4.5 and later. The generated code relies on a few things in order to work.

1. Some PDSA .DLLs need to be added to your Visual Studio project
2. A reference to System.Linq.Dynamic.dll (included in Haystack)
3. Configuration entries need to be added to your Web.Config or App.Config file in your Visual Studio project.
4. To distribute your .NET application you will need to create a runtime license from Haystack. A runtime license can only be generated from a purchased copy of Haystack, not the trial version.

Quick Start for jQuery Generation

This document describes how to generate and test an HTML page that uses jQuery to call a C# Web API Controller.

From your start menu locate the Haystack folder and click on the **Haystack Code Generator** icon. This will start the Haystack Code Generator for .NET (Figure 1). After starting Haystack add a new Haystack Project. A project is used to generate all objects from a SQL Server database.

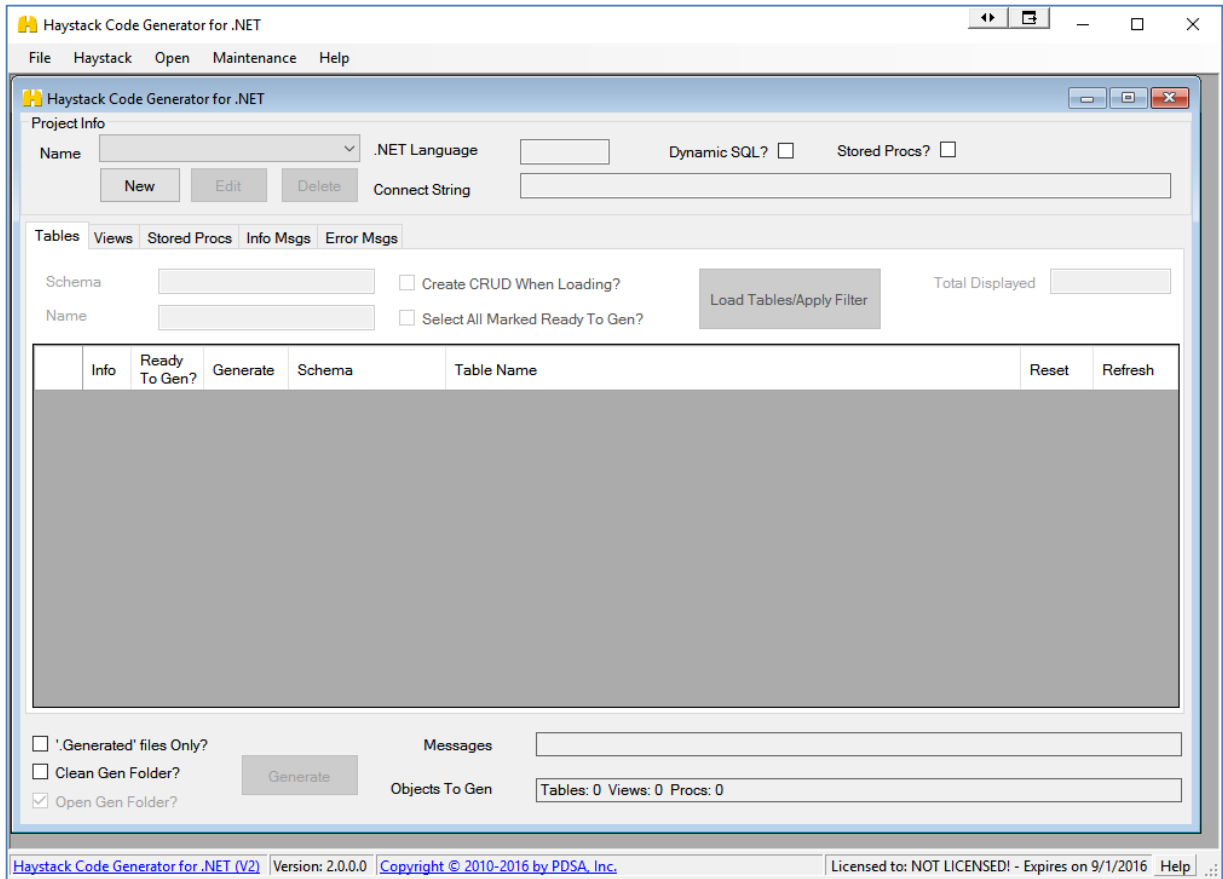


Figure 1: Haystack Main Screen

Add New Haystack Project for jQuery

Click on the “New” button beneath the Project Info Name Combo Box (Figure 2) to add a new project to Haystack.

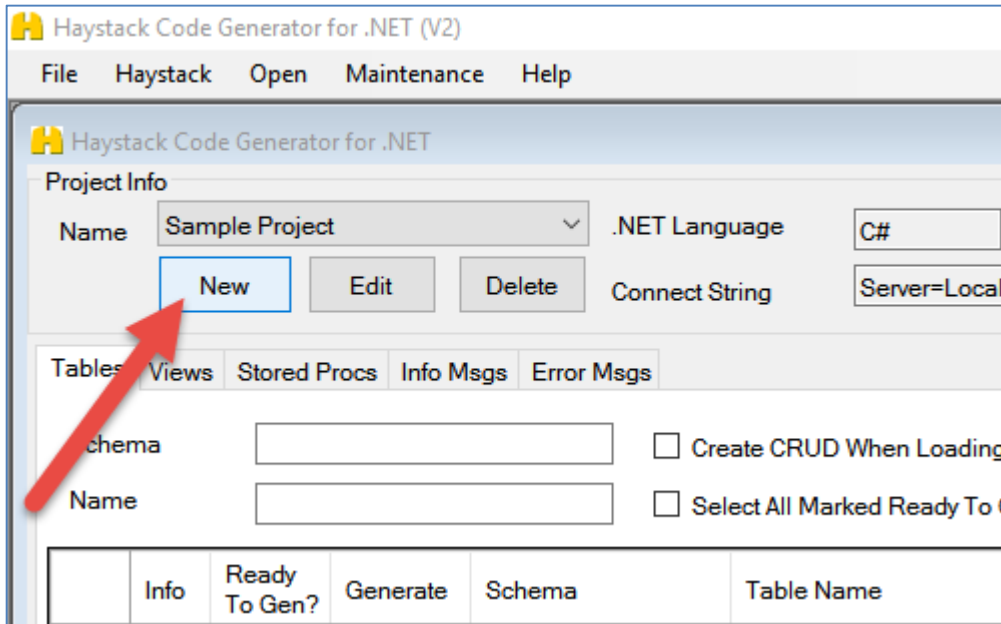


Figure 2: Click "New" to create a new Project

You will now be presented with the **Project Information** screen. On this screen is where you will create the project that points to a database.

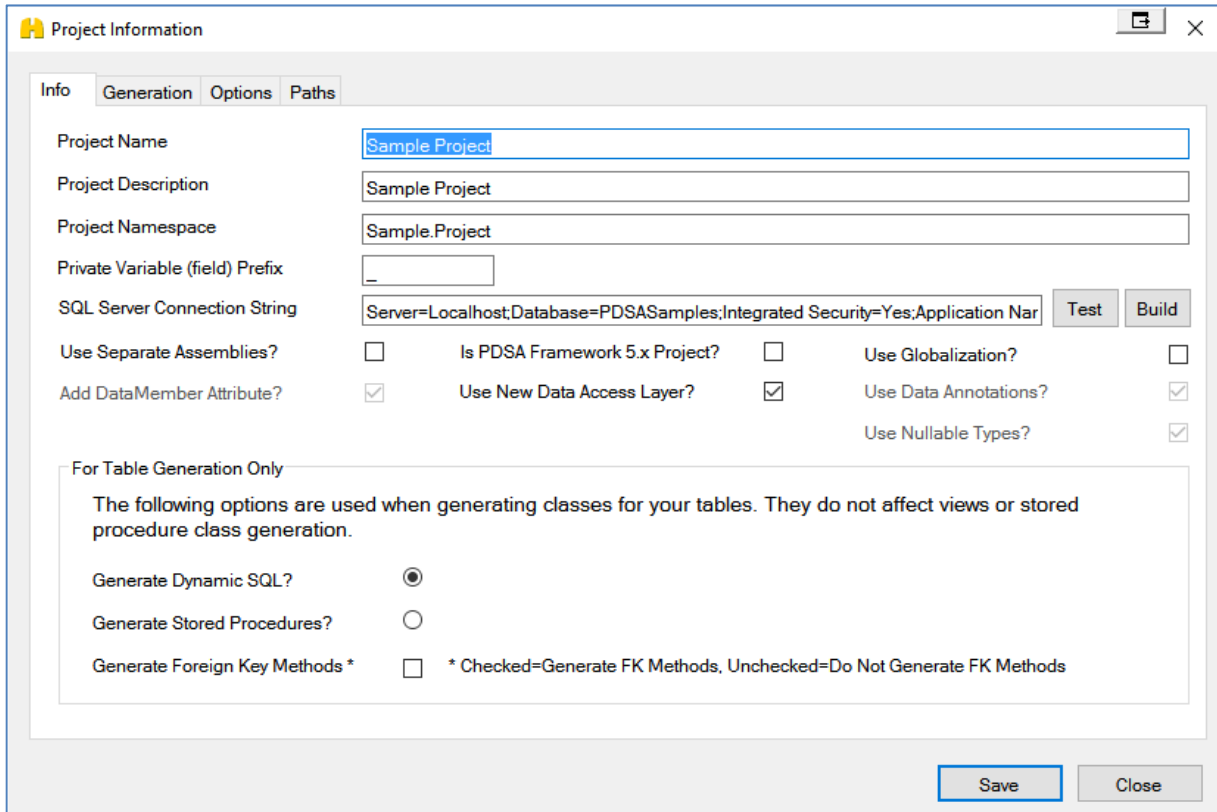


Figure 3: Project Information (Info Tab)

All you need to create a project is on this first tab (Figure 3). For this quick start, just fill in a connection string to one of your databases, or if you installed the PDSASamples database when you installed Haystack, just leave this existing connection string.

Click on the Generation Tab (Figure 4) and select **Web API/jQuery – Data Access Layer** template as shown in Figure 4

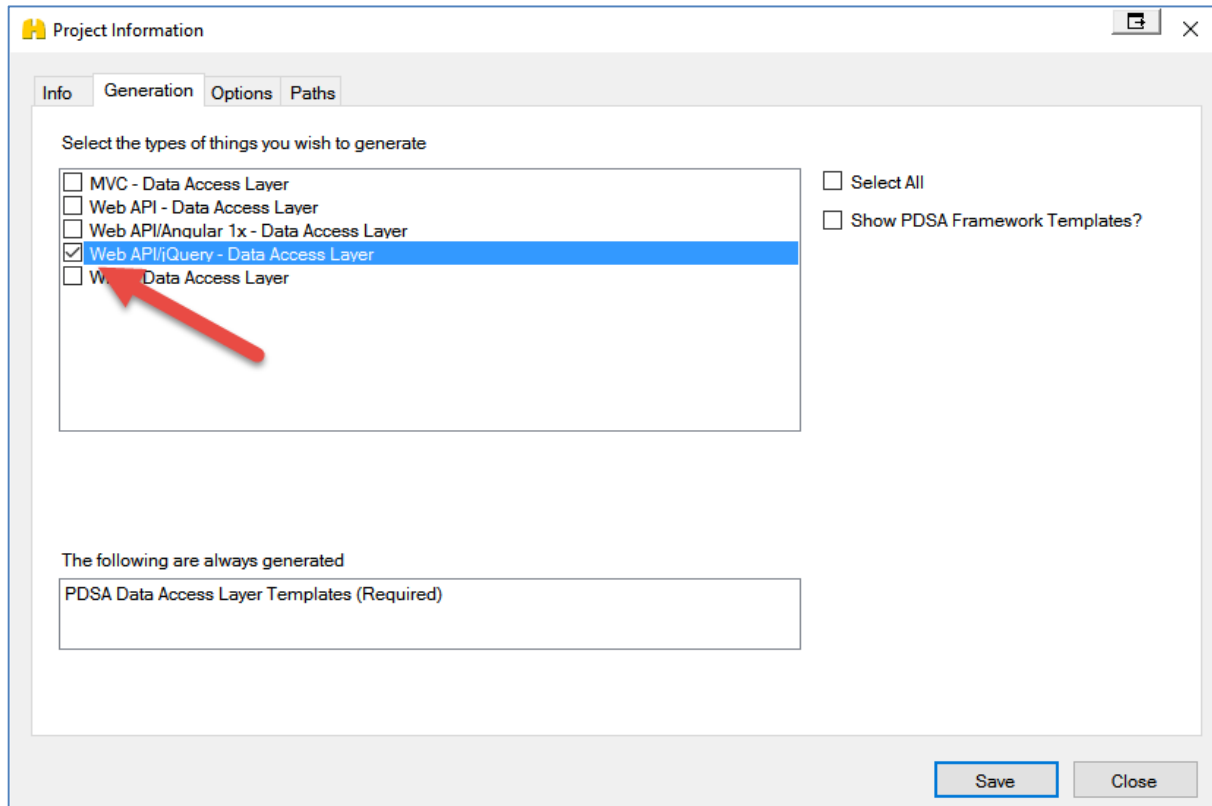


Figure 4: Project Information (Generation Tab)

Click the **Save** button to save this new project into the Haystack database.

Generate CRUD Classes for Tables - jQuery

After you have created a project and set the connection string to a valid server and database/catalog, you are now ready to read in the list of tables in the catalog or schema. Click on the **Load Tables/Apply Filter** button (Figure 5) to load in all the tables.

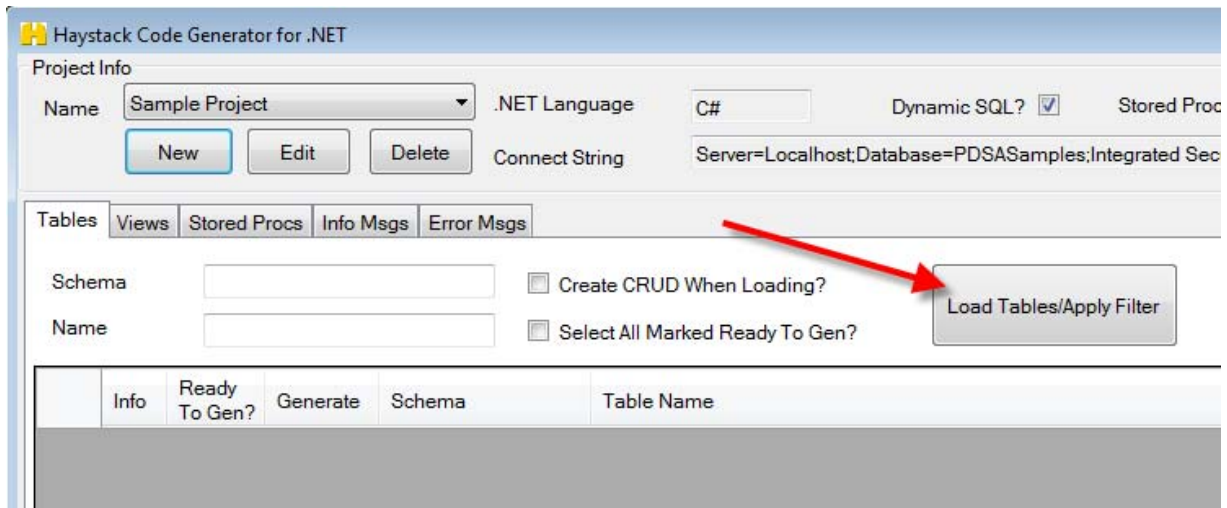


Figure 5: Load Tables

After clicking the **Load Tables/Apply Filter** button the grid on the lower part of the screen will be filled in with the names of the tables that match the filter.

At this point you need to click on the **Info** button to the left of a table to load all of the columns for the table and display the Table Information Screen (Figure 6). You must open the table to load all columns in order to generate classes for a table.

Table Information Screen for jQuery

On the Table Information Screen (Figure 6) you can add additional business rules for each column. You can read more about this screen in another chapter. But to start all you have to do right now is to click on the **Save Table Info** button. This saves all the columns for the table into the Haystack database so it can be generated.

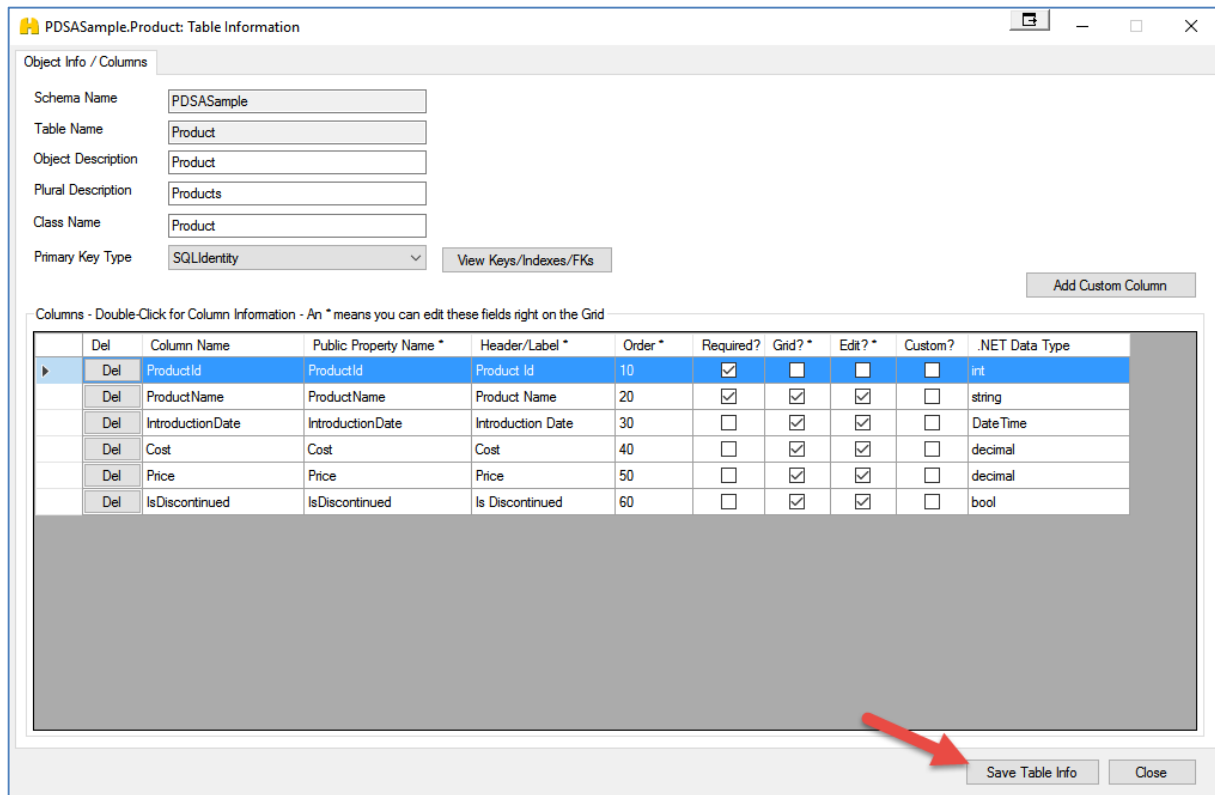


Figure 6: Table Information Screen

Generate Table Data Classes for jQuery

After saving the table information you will notice that the **Generate** check box is now checked (Figure 7). You may now click on the **Generate** button to generate the CRUD classes for the table selected.

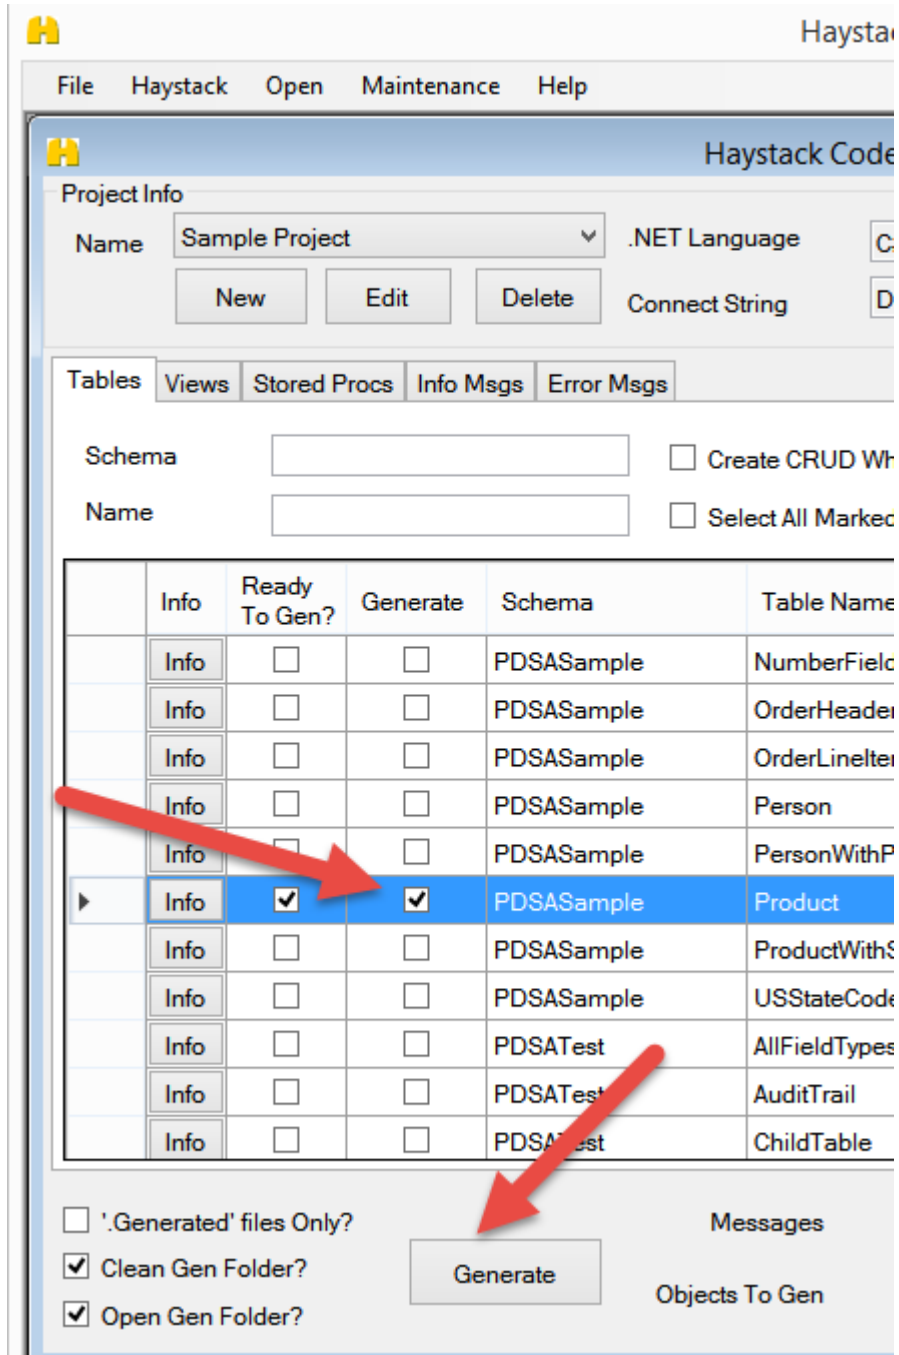


Figure 7: Generate Code

After the generation completes, a Windows Explorer window will open where all of the code was generated.

Create New Web API Project

Once the data access classes and Web API classes are generated you are ready to put them into a project and try them out.

Open Visual Studio 2015 (or later).

Click on **File | New | Project** from the menu

1. Choose the **Web** Templates (Figure 8)
2. Click on the **ASP.NET Web Application (.NET Framework)** template.
3. Fill in the **Name:** field with **Sample.Project** (or whatever namespace you used in the Project Information screen in Haystack).
4. Type in the path where you wish to save this project.
5. Click the OK button.

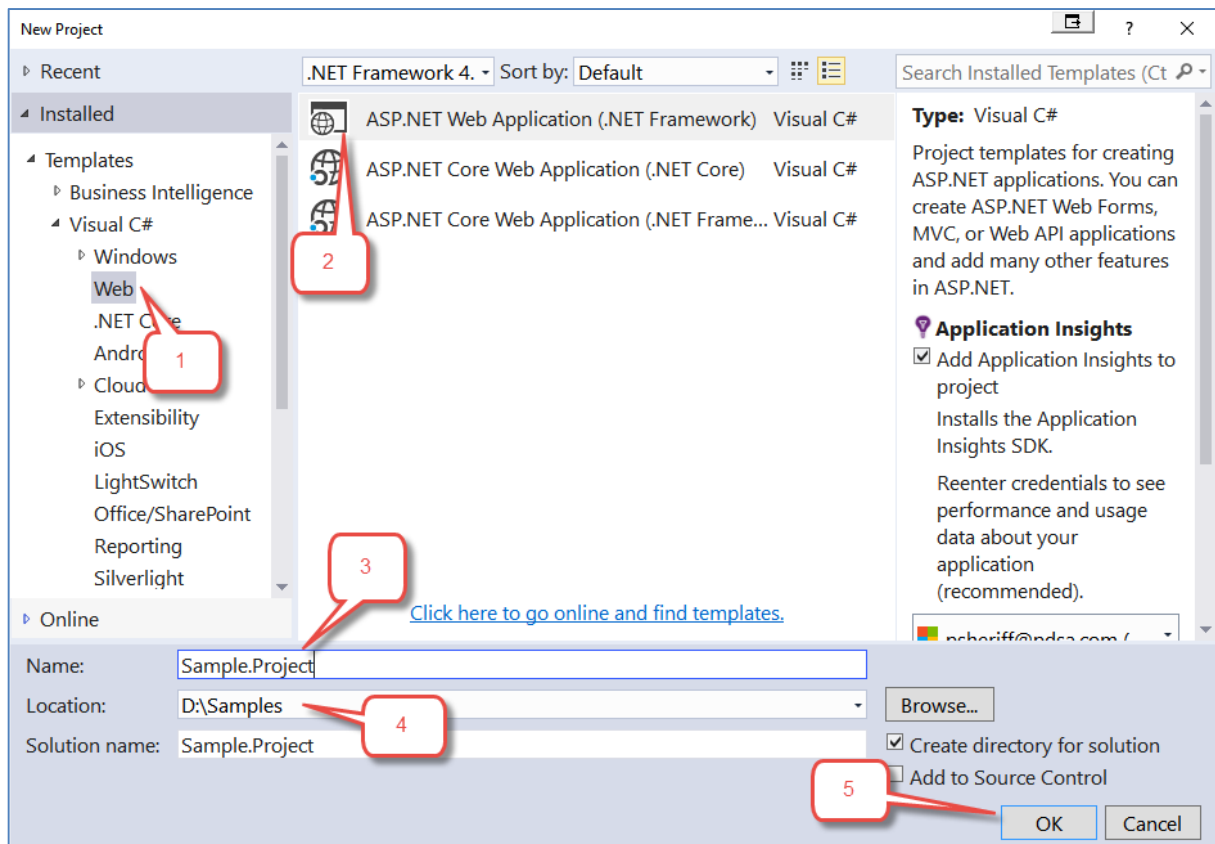


Figure 8: Create a new Project

On the next screen (Figure 9) select the Web API template. Click the **OK** button to have it create the new project.

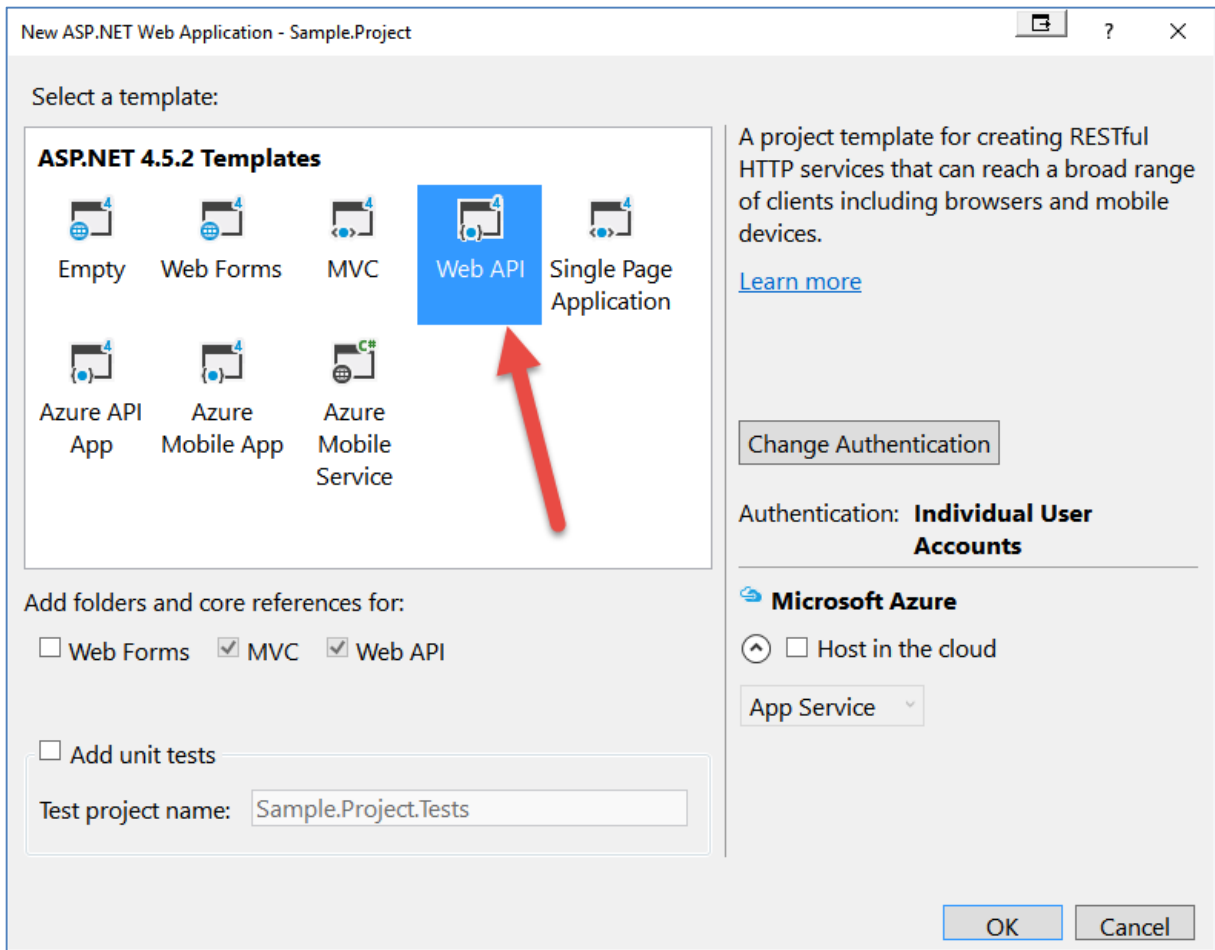


Figure 9: Select the Web API template

Copy Generated Files for jQuery

In the Windows Explorer window (Figure 10) where the code was generated, expand the **jQuery** folder and select all the folders and files and copy and paste those into the root of your new web application project in Visual Studio.

NOTE: If you are prompted that folders already exist with the same name and do you wish to replace them, answer **Yes**.

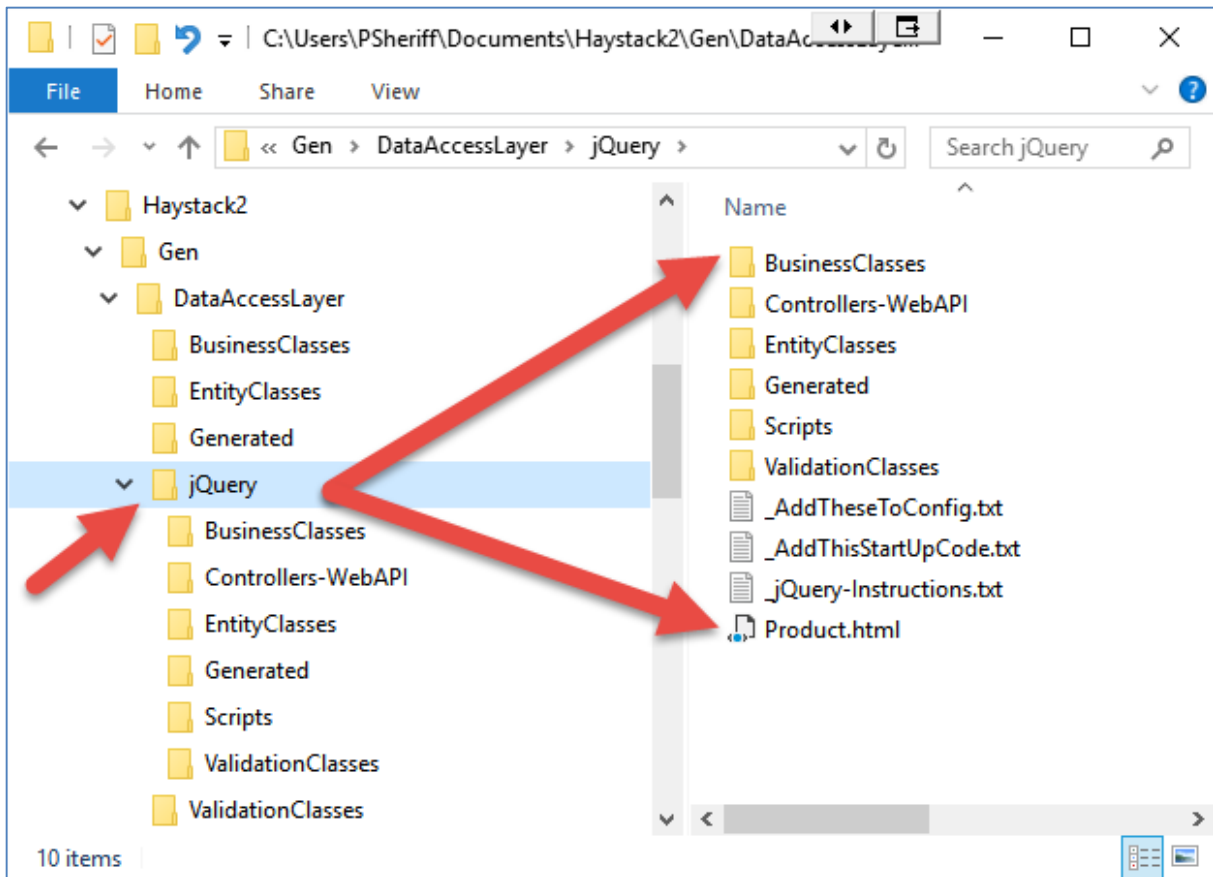


Figure 10: Copy all folders from the WebAPI folder into your Visual Studio project

Your Solution Explorer window in your Web API application should now look like Figure 11.

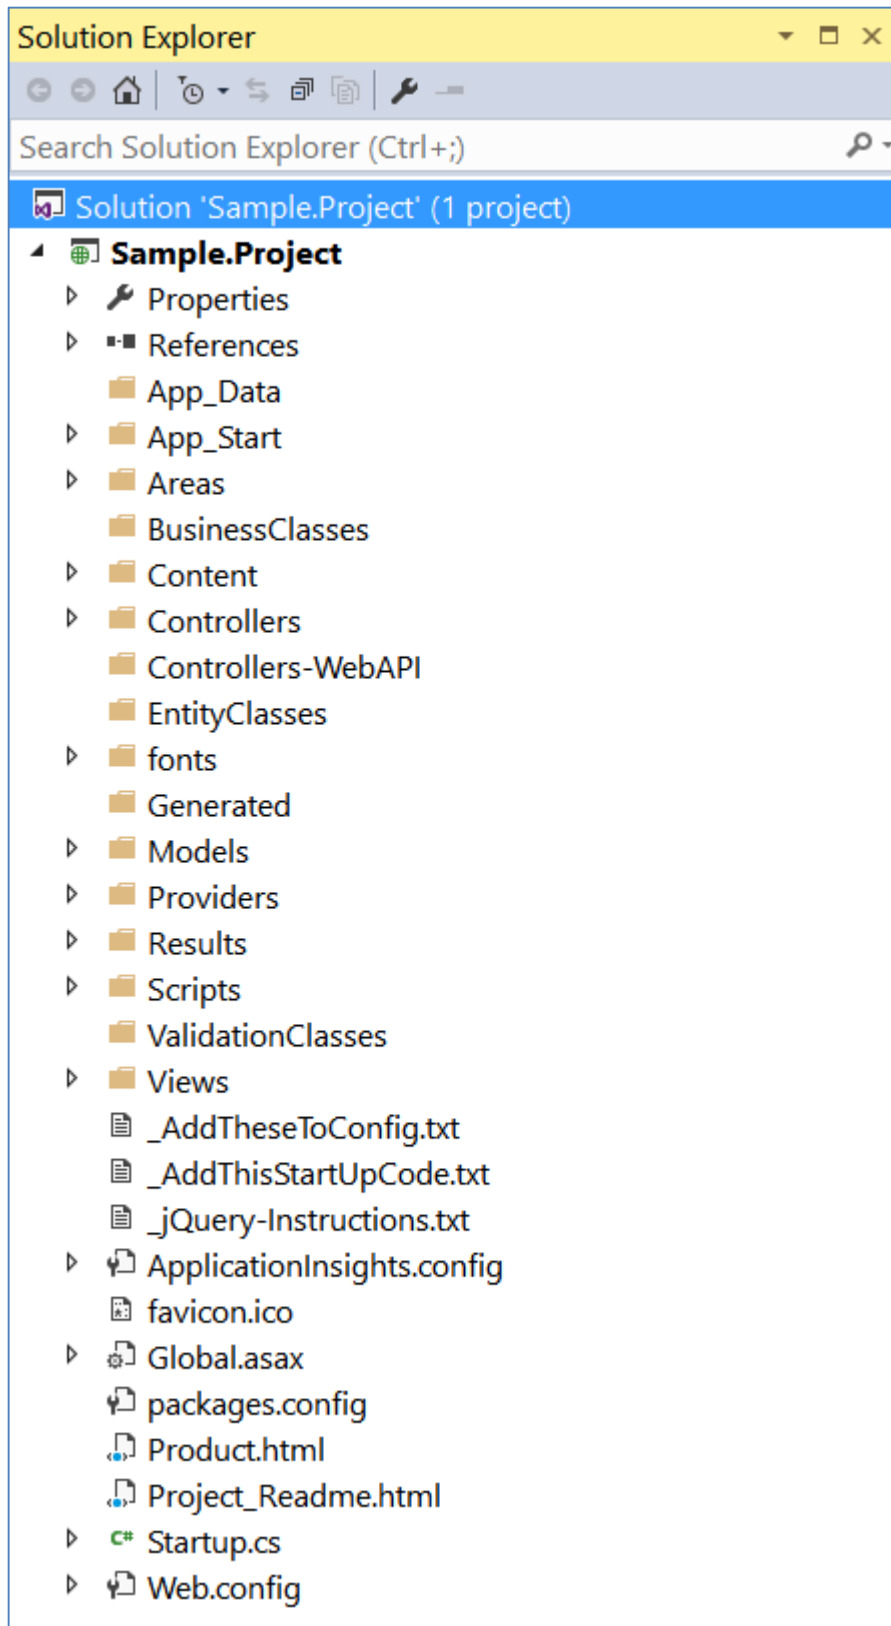


Figure 11: Your Visual Studio project after adding generated code

Include jQuery Files in Project (VS Bug)

Click on the project in the Solution Explorer window, then click on the “Show All Files” icon as shown in Figure 12.

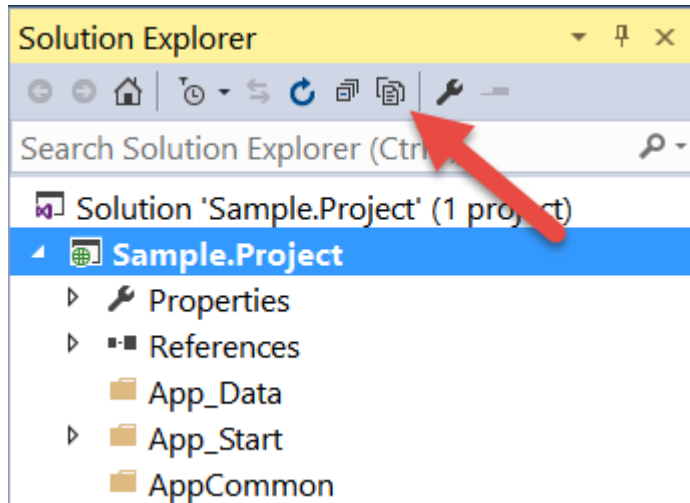


Figure 12: Click the Show All Files button to add the hidden files

Go to each of the following folders, locate the files you copied in, right mouse click and "Include in Project" each file.

- BusinessClasses
- Controllers-WebAPI
- EntityClasses
- Generated
- ValidationClasses

NOTE: This is a bug in Visual Studio where the first time you add a new folder to the project any files contained in that new folder do not get automatically added.

Add DLLs for jQuery

In order for the generated classes to compile you need to add some DLLs to the project. Click on the **References** folder in your Visual Studio project. Right mouse click and select **Add Reference...** from the context menu.

Click the **Browse** button.

Navigate to the folder where you installed Haystack which is typically **C:\Program Files (x86)\Haystack2** and under the folder named **_Resources-For-HTML5jQuery** and select the following three DLL files shown in Figure 13.

- Desaware.MachineLicense40.dll
- PDSA.Common.dll
- System.Linq.Dynamic.dll

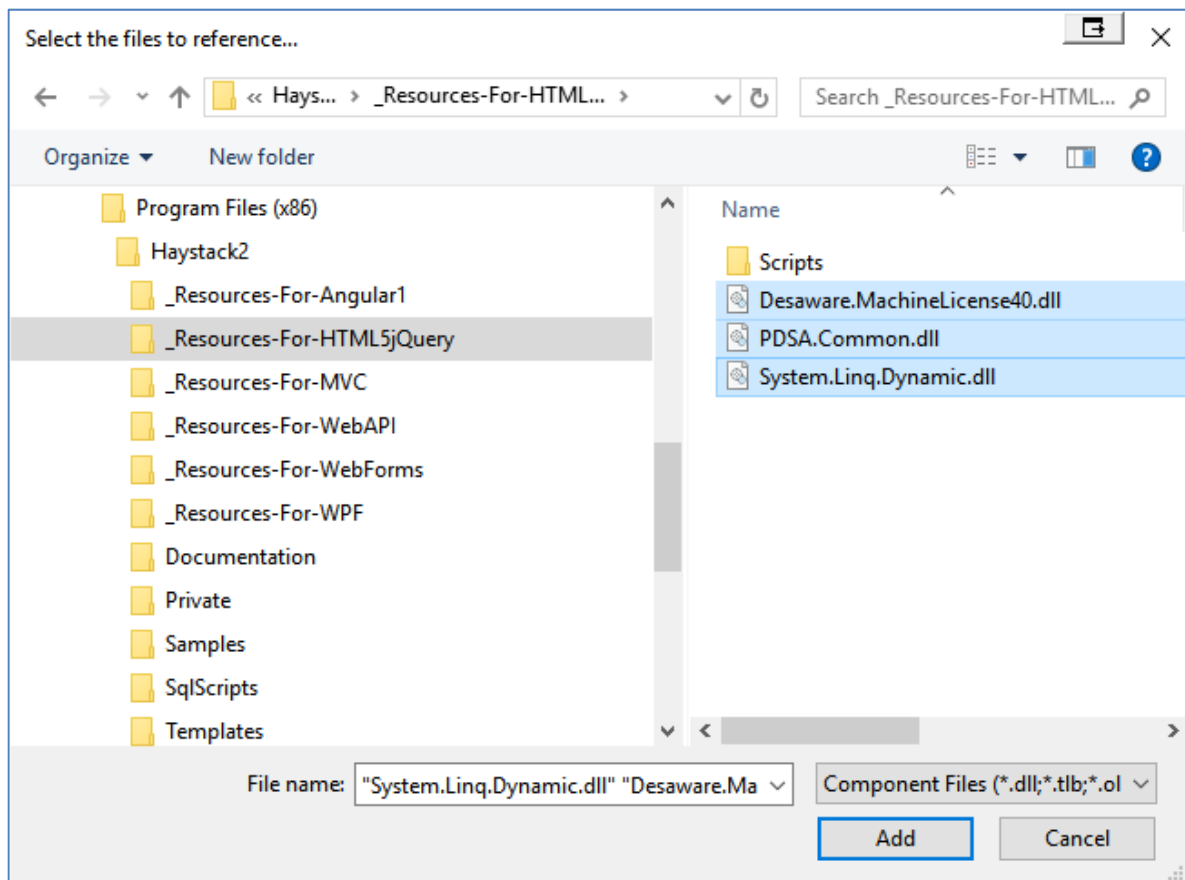


Figure 13: Reference the PDSA DLLs

At this point you should be able to successfully build the project. It is not ready to run yet, but everything should compile.

Fix up the Web.Config File for jQuery

You need to add a connection string to your Web.Config file in order for the data classes to connect to the database from which you generated your classes. Open the file `_AddTheseToConfig.txt` in your project. In there you will find the connection string to add.

Copy and paste the connection string into the `<connectionString>` element in your Web.Config.

Delete the `_AddTheseToConfig.txt` file.

Modify the Global.asax for jQuery

To initialize the PDSA Data Access layer you need to add some startup code. Open the `_AddThisStartUpCode.txt` file and copy the contents to the clipboard. Open the `Global.asax` file and paste this code after the last line in the `Application_Start()` method. You will need to add two 'using' statements in order for this code to compile as shown in Figure 14.

```
using PDSA.DataAccess;
using System;
using System.Collections.Generic;
using System.Configuration;
using System.Linq;
using System.Web;
using System.Web.Http;
using System.Web.Mvc;
using System.Web.Optimization;
using System.Web.Routing;

namespace Sample.Project
{
    0 references
    public class MvcApplication : System.Web.HttpApplication
    {
        0 references
        protected void Application_Start() {
            AreaRegistration.RegisterAllAreas();
            GlobalConfiguration.Configure(WebApiConfig.Register);
            FilterConfig.RegisterGlobalFilters(GlobalFilters.Filters);
            RouteConfig.RegisterRoutes(RouteTable.Routes);
            BundleConfig.RegisterBundles(BundleTable.Bundles);

            // Initialize Database Manager Object
            PDSADataManager.Instance = new PDSADataManager(
                new PDSADataSqlServer(
                    ConfigurationManager.ConnectionStrings["Sample.Project"].ConnectionString));

            // Set the application name
            PDSADataManager.Instance.ApplicationName = "Sample Project";
        }
    }
}
```

Figure 14: Add initialization code to the Global.asax Application_Start() method

Delete the _AddThisStartupCode.txt file.

Delete the _Angular1-Instructions.txt file.

Prepare to Run the HTML Page with jQuery

Select **Project | Sample.Project Properties...** from the Visual Studio menu.

You need to copy the port number from your Project URL in the **Web** tab as shown in Figure 15.

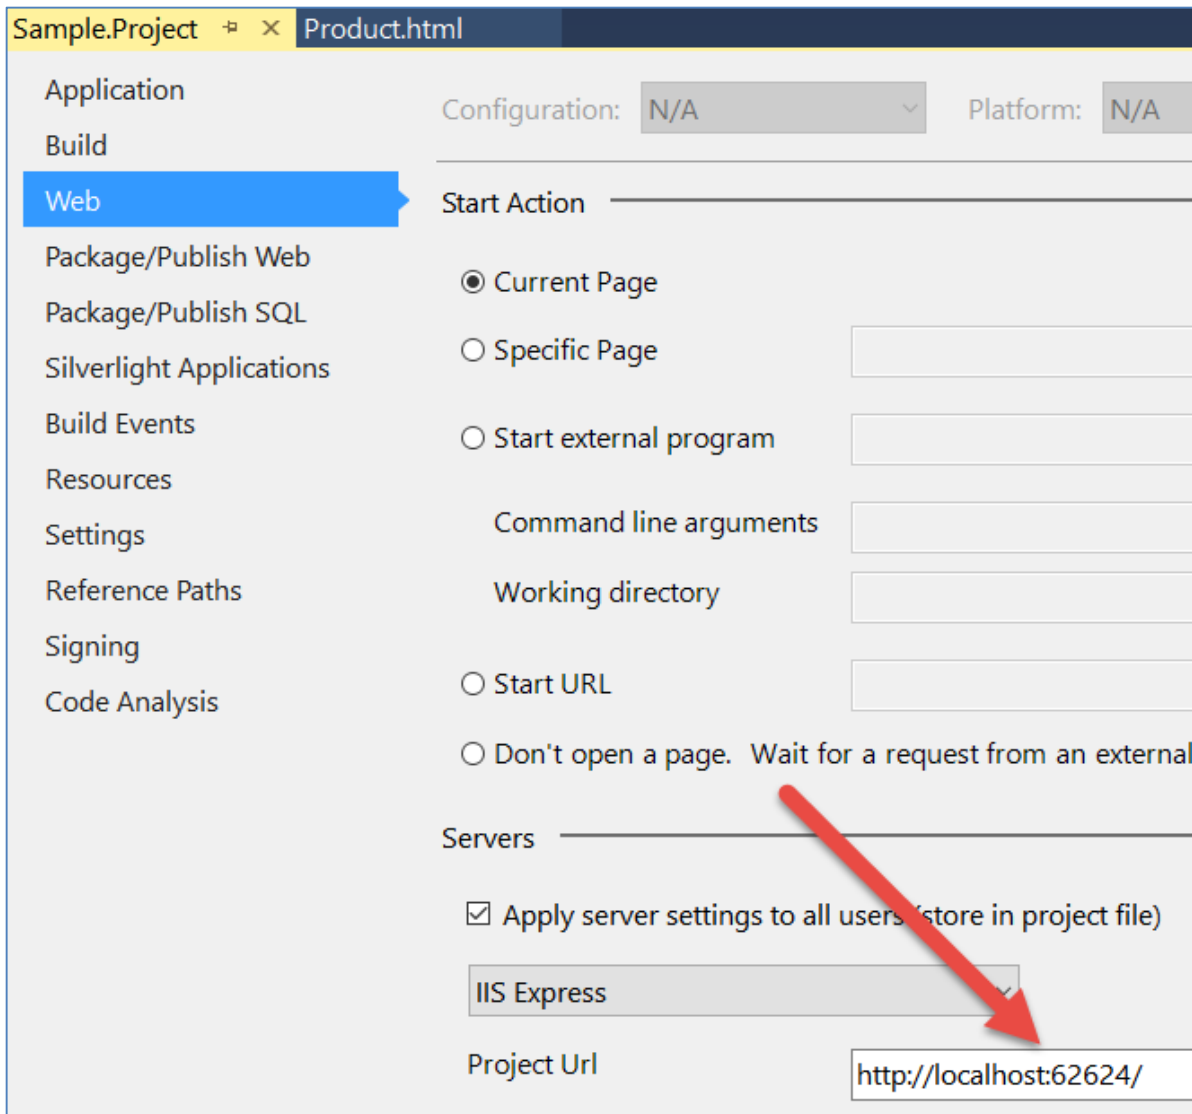


Figure 15: Set a Specific Port in your Web Application

Copy this port number to the clipboard.

Modify [ClassName].html File

Open the [ClassName].html file (for example Product.html), scroll towards the bottom where the <script> tags are located and find the URL that calls your service.

Copy the port number you selected in the previous step and replace it into the generated code as shown in Figure 16.

```
<script type="text/javascript" src="Scripts/jquery-1.10.2.min.js"></sc
<script type="text/javascript" src="Scripts/bootstrap.min.js"></script
<script type="text/javascript" src="Scripts/jquery.formatDateTime.min.
<script type="text/javascript" src="Scripts/pdsa-webapi-jquery.js"></s
<script type="text/javascript">
  // Avoid Cross-Site Scripting Error, which comes over as "No-Transp
  // jQuery.support.cors = true;

  // The Web API Service to call.
  // NOTE: Change the localhost:PORT number to be the same as the one
  var urlRoot = "http://localhost:62624/api/product";

  // *****
  // Build Collection of Product Objects
  // *****
  function getProducts() {
    $.ajax({
```

Figure 16: Replace the Port number in the service call

Run the ASP.NET application to see your generated HTML page appear.

Click on the **Get [ClassName]** button (Figure 17) and you should see your data appear in the drop down list.

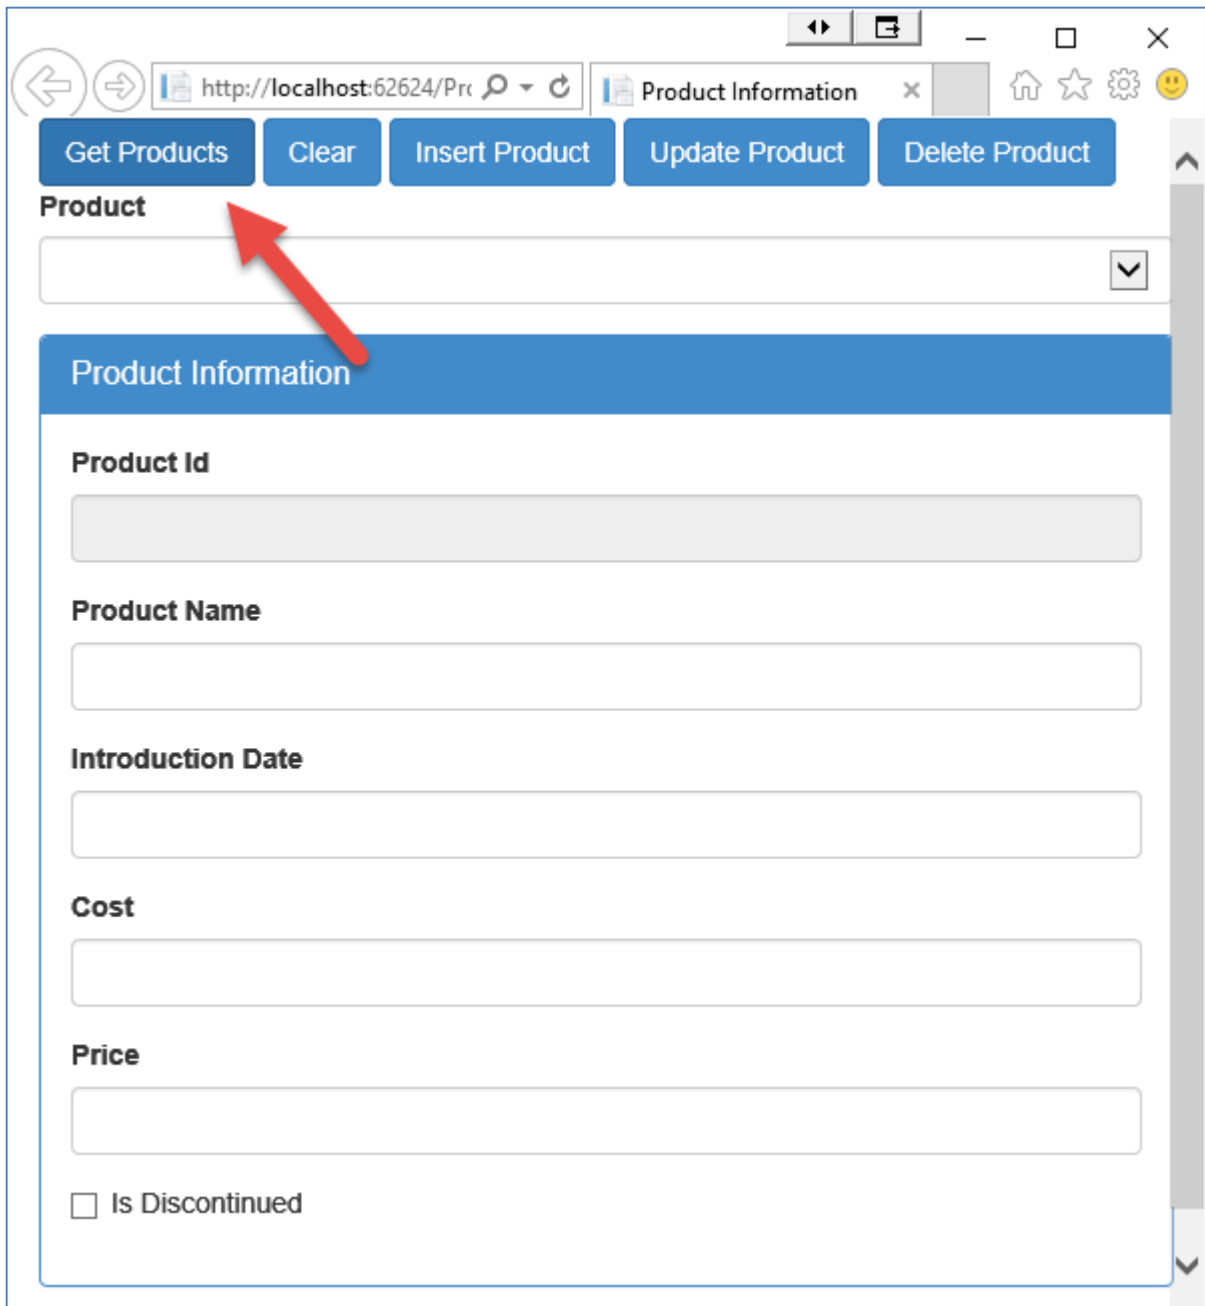


Figure 17: Click the Get Products button to have your data appear.

NOTE: It may take a couple of seconds for your data to appear the first time. It is setting up the Web API call, and the first time it takes a second or two.

Congratulations! You have now created a JQuery call from an HTML page to a generated Web API controller.

Summary

In this chapter you learned how to quickly generate CRUD classes, a Web API controller and an HTML page that uses jQuery to call a Web API.

NOTE: The PDSA DLLs ONLY run in VS.NET when you are using the DEMO version of Haystack. In order to make them run from an .EXE file you need to purchase the full version of Haystack.

Chapter Index

A

Add DLLs for jQuery, 7-14
Add New Haystack Project for jQuery, 7-3

C

Copy Generated Files for jQuery, 7-10
Create New Web API Project, 7-9

F

Fix up the Web.Config File for jQuery, 7-15

G

Generate Button, 7-7
Generate CRUD Classes for Tables -
jQuery, 7-5
Generate Table Data Classes for jQuery,
7-7

H

HTML5, 7-2

I

Include jQuery Files in Project, 7-13
Info Button, 7-6

J

jQuery, 7-2

L

Load Tables/Apply Filter Button, 7-6

M

Modify the Global.asax for jQuery, 7-15

P

Prepare HTML Page for jQuery, 7-16

Q

Quick Start for jQuery, 7-2

S

Save Table Info Button, 7-6

T

Table Information Screen for jQuery, 7-6
Tutorial for jQuery, 7-2

U

Using Haystack Generated Code for
jQuery, 7-2

W

Web API, 7-2